


Electrical Characteristics	CL60M
Maximum power (Pmax)	60W
Voltage at Pmax (Vmp)	18.2V
Current at Pmax (Imp)	3.30A
Open-circuit voltage (Voc)	21.7V
Short-circuit current (Isc)	3.50A
Temperature coefficient of Voc	$-(0.40 \pm 0.05)\% / ^\circ\text{C}$
Temperature coefficient of Isc	$(0.065 \pm 0.01)\% / ^\circ\text{C}$
Temperature coefficient of power	$-(0.5 \pm 0.05)\% / ^\circ\text{C}$
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	1000V DC
Power tolerance	± 3%
Cells	monocrystalline silicon solar cell
No. of cells and connections	32(2X16)
Module Dimension	800mm[31.49in.]x400mm[15.75in.]x30mm[1.18in.]
Weight	3.4kg[7.4lbs]


* STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C

* Specifications are subject to change without notice at any time.


Module Diagram

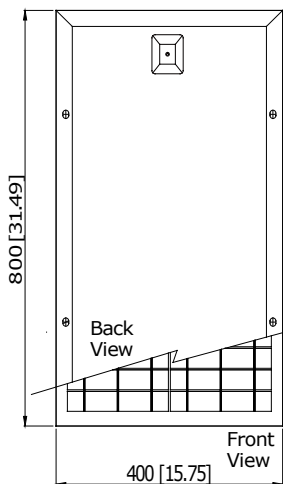

Dimensions in brackets are in inches.
Un-bracketed dimensions are in millimeters.
Unit:mm[in.]




Junction Box
Top View (Lid open)





Section A-A

I-V Curves

I-V Curves of PV module CL60M

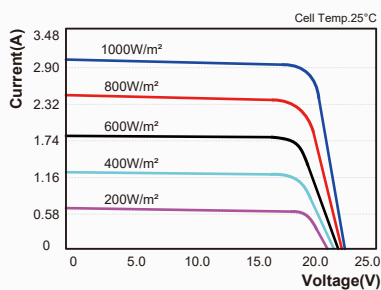

I-V Curves of PV module CL60M at various cell temperatures

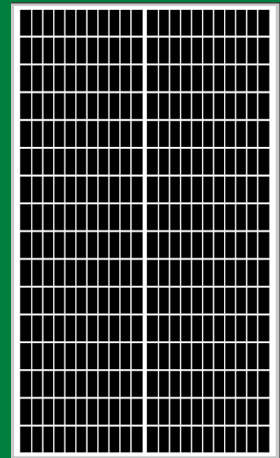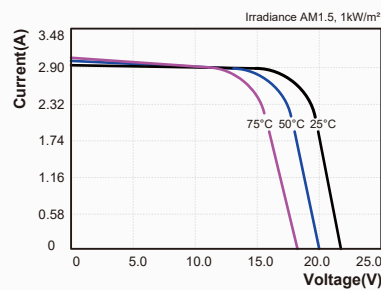

Key Features:

- High module efficiency and stable power output
- Based on leading process technology
- Outstanding electrical performance under high temperature conditions or low irradiance conditions
- Easy of installation and all-weather applications
- 5 years product warranty(materials and workmanship)
- 20 years module power output warranty
- Peak power of single module is guaranteed in ±3% power tolerance
- Strong framed module
- The manufacture is certified for ISO 9001:2015

Product's Guarantee

- 5 years products life warranty
- 15 years module power output no less 90%
- 20 years module power output no less 80%

Applications

- Off grid residential roof-tops
- Off grid commercial/industrial roof-tops
- Rural area applications
- Solar power system
- Other off-grid applications